



Size:8x16cm
展開:8x32cm

EN



RIO 3 True Wireless Earphone

- ① SECURELY ADJUST THE FLEXIBLE CLASP AROUND YOUR EAR



- ② PRESS AND HOLD LEFT EARPHONE POWER BUTTON FOR 5 SECONDS UNTIL YOU HEAR VOICE PROMPTS

- ☞ POWER ON
- ☞ PAIRING

③ PAIRING


- ④ TAP "RIO 3" ON YOUR DEVICE

- ☞ PHONE CONNECTED



- ⑤ PRESS AND HOLD RIGHT EARPHONE POWER BUTTON FOR 2 SECONDS UNTIL YOU HEAR THESE VOICE PROMPTS



- ☞ POWER ON
- ☞ HEADSET CONNECTED



1



Button functions

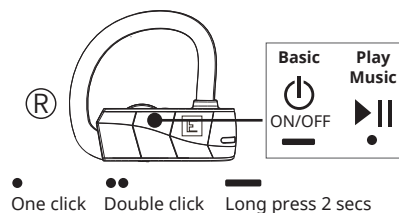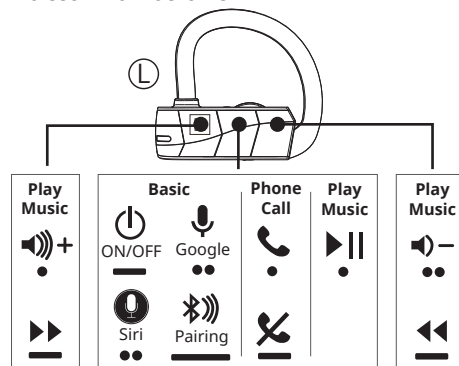


- One click
- Double click
- Long press 2 secs

Long press 5 secs

Charging guidelines

Open the USB port cover and insert the Micro USB cable to charge.
LED turns red when charging and white when earphones are fully charged.

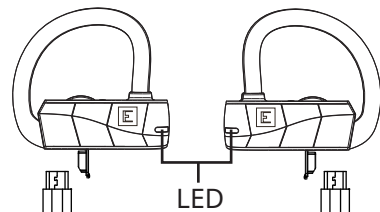


2



Headset sync


Turn both earphones off. Press and hold the "+" button on the left earphone and the "Power" button on the right earphone for 5 seconds until you hear "true wireless stereo pairing" followed by "headset connected". The two earphones are now fully connected and synced

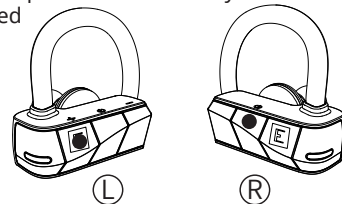

Factory reset

Turn on the left earphone first. Then press and hold the "+" and "-" buttons on the left earphone for 5 seconds until its LED flashes red and white twice.

The earphone is now reset



LED indicators

Action	LED indicators
Power on	White LED flash for 1 second
Power off	Red LED flash for 1 second
Pairing	Red and white LED flash alternately
Play music	White Breathing Light
SBC audio mode	One blinking red (Left earphone)
AAC audio mode	Red LED blinks 3 times

3



aptX audio mode	Red LED blinks 3 times
Phone call	White LED blinks 5 times (cycle repeats)
Low battery	All LED are showed in red
Charging	Red LED (Solid)
Fully charged	White LED (Solid)
Factory Reset	Red and white LED flash twice

Technical Specifications

Bluetooth specification	BT Version 4.2
Bluetooth Profile	A2DP 1.3, AVRCP 1.6, HFP 1.6, HSP 1.2
Supported audio codecs	aptX / AAC / SBC
Wireless Range (from paired device)	10M (30feet)
Battery Capacity	130 mAh / each
Driver Size	Ø 14.2mm Comply Diaphragm Driver
Sensitivity	100 db@1kHz
Frequency	20Hz ~ 20KHz
Impedence	32 Ohm
Microphone MEMS Omni Direction Type Input Sensitivity	-38dB (+, - 3dB)
Water Resistance	Nano Coating IPX5
Dimensions	51mm (L) x 34mm (D) x 46mm(H)
Weight	14g x 2



Battery time:

- Headset : 6hrs music / 8hr talk
- 2hr to full charge
- **Important: fully charge earphones before first use

4

RIO 3 True Wireless Earphone

- ① SECURELY ADJUST THE FLEXIBLE CLASP AROUND YOUR EAR



- ② PRESS AND HOLD LEFT EARPHONE POWER BUTTON FOR 5 SECONDS UNTIL YOU HEAR VOICE PROMPTS

- 🔊 POWER ON
- 🔊 PAIRING

- ③ PAIRING


- ④ TAP "RIO 3" ON YOUR DEVICE

- 🔊 PHONE CONNECTED





- ⑤ PRESS AND HOLD RIGHT EARPHONE POWER BUTTON FOR 2 SECONDS UNTIL YOU HEAR THESE VOICE PROMPTS

- 🔊 POWER ON
- 🔊 HEADSET CONNECTED



Button functions

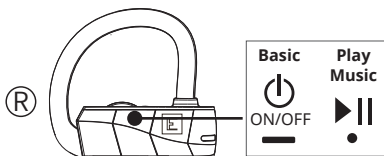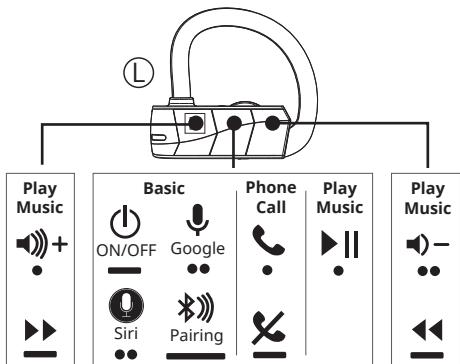


● One click ●● Double click — Long press 2 secs

— Long press 5 secs

Charging guidelines


Open the USB port cover and insert the Micro USB cable to charge.

LED turns red when charging and white when earphones are fully charged.

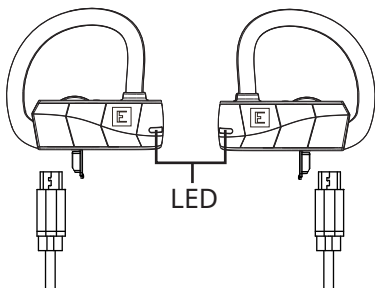


Headset sync

Turn both earphones off. Press and hold the “+” button on the left earphone and the “Power” button on the right earphone for 5 seconds until you hear “true wireless stereo pairing” followed by “headset connected”. The two earphones are now fully connected and synced

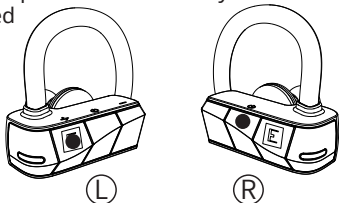

Factory reset

Turn on the left earphone first. Then press and hold the “+” and “-” buttons on the left earphone for 5 seconds until its LED flashes red and white twice. The earphone is now reset



LED indicators

Action	LED indicators
Power on	White LED flash for 1 second
Power off	Red LED flash for 1 second
Pairing	Red and white LED flash alternately
Play music	White Breathing Light
SBC audio mode	One blinking red (Left earphone)
AAC audio mode	Red LED blinks 3 times

aptX audio mode	Red LED blinks 3 times
Phone call	White LED blinks 5 times (cycle repeats)
Low battery	All LED are showed in red
Charging	Red LED (Solid)
Fully charged	White LED (Solid)
Factory Reset	Red and white LED flash twice

Technical Specifications

Bluetooth specification	BT Version 4.2
Bluetooth Profile	A2DP 1.3, AVRCP 1.6, HFP 1.6 ,HSP 1.2
Supported audio codecs	aptX / AAC / SBC
Wireless Range (from paired device)	10M (30feet)
Battery Capacity	130 mAh / each
Driver Size	Ø 14.2mm Comply Diaphragm Driver
Sensitivity	100 db@1kHz
Frequency	20Hz ~ 20KHz
Impedence	32 Ohm
Microphone MEMS Omni Direction Type Input Sensitivity	-38dB (+, - 3dB)
Water Resistance	Nano Coating IPX5
Dimensions	51mm (L) x 34mm (D) x 46mm(H)
Weight	14g x 2

Battery time:

- Headset : 6hrs music / 8hr talk
- 2hr to full charge

**Important: fully charge earphones before first use